

Model 003-IFC® Cartridge Circulator

The compact Taco 003-IFC with an Integral Flow Check is designed for circulating hot and chilled fresh water in open and closed loop applications. With its patented location at the impeller inlet, the IFC eliminates the added installation costs of a separate in-line flow check, simplifies piping and improves system performance. The unique, replaceable cartridge contains all moving parts and is easy to service instead of replacing the entire unit. The self-lubricating, maintenance free design provides quiet, efficient operation and unmatched reliability.



HYDRONIC COMPONENTS & SYSTEMS

Do it once.
Do it right.® **Taco**®

Submittal Data Information Model 003-IFC® Cartridge Circulator

Features

- Integral Flow Check (IFC®) Patent# 5,664,939
Prevents gravity flow / reverse flow
Eliminates separate in-line flow check
Reduces installed cost
Improves system performance
Easy to service
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Self lubricating, No mechanical seal
- Wide range of applications
- 1/2", 3/4" Sweat, or Union connections

Materials of Construction

Casing (Volute): Bronze
Integral Flow Check (IFC®):
Body, Plunger....Acetal
O-ring Seals.....EPDM
Spring.....Stainless Steel
Stator Housing: Steel
Cartridge: Stainless Steel
Impeller: Non-Metallic
Shaft: Ceramic
Bearings: Carbon
O-Ring & Gaskets: EPDM

Model Nomenclature

B – Bronze
BC – Bronze, Panel Mount Taps
IFC – Integral Flow Check

Performance Data

Flow Range: 0 - 6 GPM
Head Range: 0 - 4.5 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 220°F (104°C)
Maximum Working Pressure: 125 psi
Connection Sizes: 1/2", 3/4" Sweat, Union Mount



FOR INDOOR USE ONLY


Application

- Domestic Hot Water Recirculation
- Hydro-Air Fan Coils
- Heat Recovery Units
- Water Source Heat Pumps
- Potable Water Systems


The 003-IFC with an Integral Flow Check (IFC®) is designed for the circulation of hot or chilled fresh water in open or closed loop applications. The IFC feature simplifies piping, eliminates separate in-line flow check, reduces installation costs and improves system performance. With its patented location at the impeller inlet, the IFC is easy to service without removing the entire unit from system piping. The unique, replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator.

Pump Dimensions & Weights

		A		B		C		D		E		F		Ship Wt.	
Model	Conn.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
003-BC4-1-IFC	1/2" Swt	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	4-3/8	111	6.0	2.7
003-BC4-IFC	3/4" Swt	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	4-3/8	111	6.0	2.7
003-B4-2-IFC	Union	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	5-15/16	151	6.0	2.7

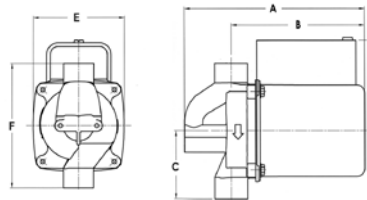


Mounting Positions

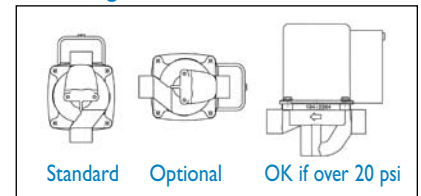

Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	.45	3250	1/40
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Performance Field - 60Hz

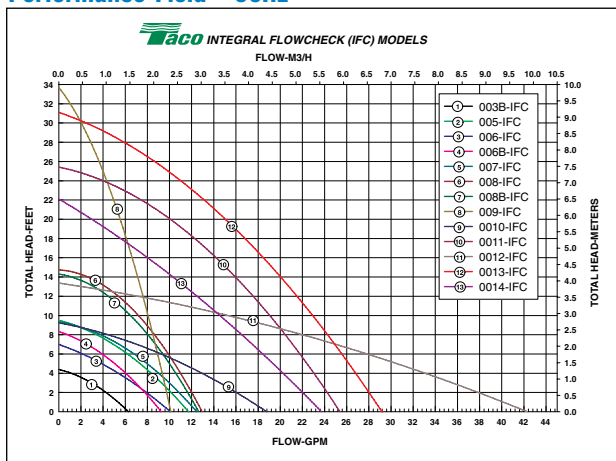

HYDRONIC COMPONENTS & SYSTEMS

Do it once.
Do it right.® **Taco®**