




***YOUR SINGLE SOURCE
FOR QUALITY MOTORS***

HEATING MOTOR CATALOGUE

2007

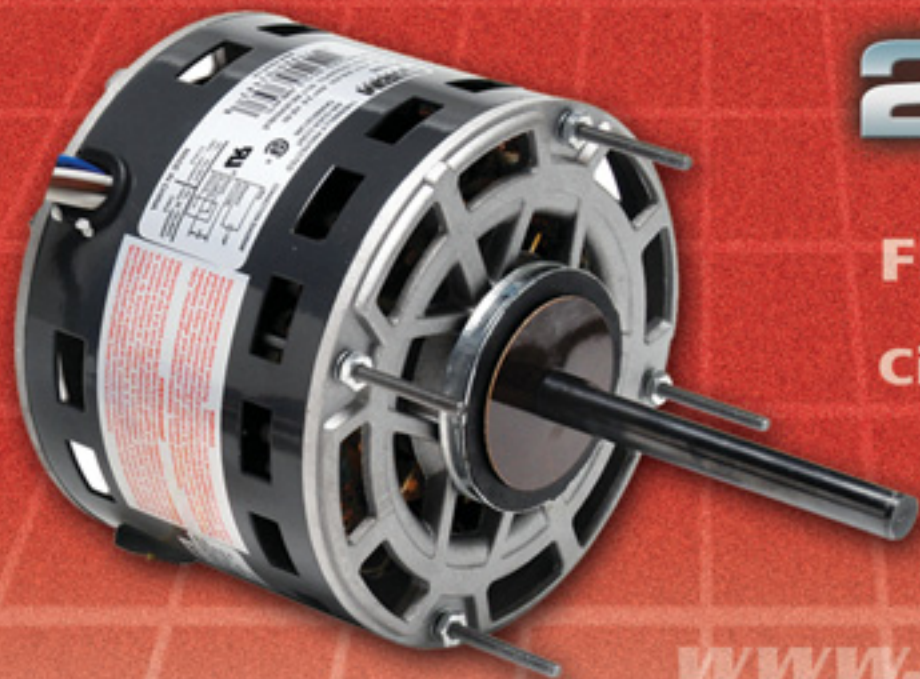

**Ventilation
Flue Exhaust
Incremental
Circulator Pump
Oil Burner
Direct Drive
Belted Fan
Unit Heater**

www.alltemp.ca

**AVAILABLE
WINTER 2007!!!**

NEW!

Goodman

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Cross
FB-RFB590	1/30	115	1.40	SP	3000	CW	5.44"	Skel	Ball	B40590-00
FB-RFB595	1/30	115	1.40	SP	3000	CW	5.89"	Skel	Ball	B18590-05
FB-RFB276	1/30	115	1.40	SP	3000	CW	5.44"	Skel	Ball	0131M00002P
FB-RFB501	1/20	115	2.80	SP	3000	CW	5.57"	Skel	Ball	22307501

G.S.W. - John Woods Water Heater

Cross Reference: GSW 63172, 63418, Fasco 7021-8247

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB172	1/20	115	1.30	SP/Open	1/3200	CCW	12.5"	3.3"	Sleeve

**AVAILABLE
NOW!!**



ICP

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Cross
FB-RFB330	1/20	115	2.40	SP	3000	CCW	-	Skel	Ball	330701-701, 329148-701, 1013915
FB-RFB433	1/35	115	1.50	SP	3000	CW	6.00"	Skel	Ball	1014433, 1014529
FB-RFB833	1/30	115	1.60	SP	3000	CCW	6.50"	Skel	Ball	1013833I

Lennox

Cross Reference - 88K8401, 85L49

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB840	1/50	115	1.30	SP	3000	CW	5.83"	Skel	Ball

Olsen

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Cross
FB-RFB467	1/30	115	1.70	SP	3000	CW	5.94	Skel	Ball	29467
FB-RFB612	1/20	115	1.30	SP	3000	CCW	6.00	3.3"	Ball	27612
FB-RFB614	1/20	115	1.30	SP	3000	CW	6.00	3.3"	Ball	27614

Rheem

Cross Reference - 70-24157-03

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB157	1/20	115	1.71	SP	3400	CCW	6.50"	3.3"	Ball

Trane

Cross Reference - 787P01

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB787	1/30	115	1.20	SP	3000	CW	6.00"	Skel	Ball

Humidifier Motors

Part #	Description	Watts	Volts	RPM	Cross Reference
71-2800	General replacement, includes 3 shaft adapters.	4	24	.83/1	33, 105, 37, 76, 240, 447, 465, 801, 45S, 90S, MD035, 60.
71-2897	C/W mounting plate & 2 shaft adapters.	4	24	.83/1	Autoflow 97, Lennox WD2-20



71-2800



71-2897

Skeleton Motors & Fan Kits

- Bilingual Packaging
- 115, 208 & 230 Volt
- Mechanically Reversible
- Shaded Pole
- C Frame Motor
- Sleeve Bearing



All Mechanically Reversible!

Applications

- Electric Htrs.
- Range Hoods
- Exhaust Fans
- Ventilators
- Vending Machines


Part #	HP	Volts	Amps	Stack	RPM	Rot.	Shaft	Features	Cross Reference
 T1-R617	1/300	208/230	0.25	0.400"	1900	CCW	.181"×1.3"	Bare Wire Leads	Dimplex/ Westcan, Chromalox
 T1-R616	1/250	115/230	0.40/ 0.20	0.400"	2100	CCW	.181"×1.25"	Dual Voltage Spade Wire Leads	Westcan/ Dimplex
 T1-R3500	1/200	115	0.40	0.650"	3000	CCW	7/32"×2.30"	2 Prong Plug	65102
 T1-R630	1/185	115	0.76	0.550"	1550	CW	7/32"×1.90"	0.63" Flat On Shaft 2 Prong Plug	Reversomatic EB50
 R7-RB20	1/185	115	0.76	0.550"	1550	CW	7/32"×1.90"	Mtr., Bracket & Blade 2 Prong Plug	Reversomatic EB50
 T1-RF100-2	1/160	115	0.55	0.650"	2/3000	CCW	3/16"×1.0"	Bracket & Blade Inc. Bare Wire Leads	100 CFM Fireplace Blwr.

Skeleton Motors Continued On Next Page

Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

Skeleton Motors & Fan Kits

Skeleton Motors Continued From Previous

Part #	HP	Volts	Amps	Stack	RPM	Rot.	Shaft	Features	Cross Reference
 T1-R3670	1/150	115/230	0.45/ 0.25	0.650"	3000	CCW	3/16"x1.475"	2 Fan Blades 2 Prong Plug & Bare Wire	Hardware Kit
 T1-R3100	1/145	115	0.50	0.650"	3000	CW	7/32"x1.73"	Inc. Fan Blade 2 Prong Plug	
 T1-R670	1/125	115	0.50	0.650"	3000	CCW	3/16"x1.30"	Hardware Kit & 2 Blades 2 Prong Plug	65670, 14001, 600, 700, 710, EM670, SM670
 R7-RB30	1/125	115	0.75	0.500"	3000	CW	7/32"x1.75"	Bracket & Blade Inc. 2 Prong Plug	Reversomatic DK260-DB200
 T1-R3550	1/115	115	0.60	0.550"	3000	CCW	7/32"x1.75"	Fan Blade Included 2 Prong Plug	65100, 33-100, Nutone C65878, EM-550, SM550, VFM-100
 T1-R673	1/110	115	0.60	0.650"	2/3000	CCW	3/16"x1.25"	2 Speed, Hardware Kit & 2 Blades Bare Wire Leads	4673, 14007, 65673, AM-673, EM673, J673, K673, SM673
 T1-R634	1/90	208/230	0.60	1.125"	1730	CCW	7/32"x1.0"	Construction Htr. Spade Wire Leads	Westcan/ Dimplex
 T1-R604	1/85	115	0.67	0.065"	2700	CW	.181"x1.16"	2 Prong Plug	Broan/ Nutone
 T1-R3103	1/75	115	0.75	0.750"	3000	CW	7/32"x2.44"	Shaft Flat & 2 C-ring Grooves 2 Prong Plug	

Skeleton Motors Continued On Next Page

Skeleton Motors & Fan Kits

Skeleton Motors Continued From Previous

Part #	HP	Volts	Amps	Stack	RPM	Rot.	Shaft	Features	Cross Reference
 T1-R3555	1/75	115	0.90	0.650"	3000	CW	7/32"x2.40"	2 Prong Plug	65106, 33-106, C68627, EM-555, SM555, VFM-106
 T1-R635	1/75	208/230	1.00	1.500"	1550	CW	1/4"x2.0"	Construction Htr. Spade Wire Leads	Westcan/ Dimplex
 T1-R3101	1/70	115	0.70	0.875"	2/3000	CCW	7/32"x1.56"	2 Speed 3 Pin Plug	
 T1-R3553	1/70	115	0.70	0.750"	3000	CW	7/32"x1.80"	Bare Wire Leads Ring Term. Grnd.	Nutone/ Broan 65104, 33-104, C66582, EM-553, SM553, VFM-104
 T1-R684	1/70	115	0.85	0.875"	3000	CCW	7/32"x2.10"	0.875" Flat On Shaft, 12" Cord & 2 Prong Plug	Mr. Whisper, Nuvent 2000A, P90CB, 2584SP
 T1-R3552	1/55	115	0.65	0.900"	3000	CW	7/32"x1.22"	2 Prong Plug Ring Term. Grnd.	65103, 33-103, C63675, EM-552, SM552, VFM-103
 T1-R3551	1/55	115	0.90	0.900"	2/3000	CCW	7/32"x1.40"	3 Pin Plug	65101, 33-101, C52367, EM-551, SM551, VFM-101
 T1-R3554	1/50	115	1.00	0.900"	2/3000	CW	7/32"x1.40"	Bare Wire Leads	65105, 33-105, C27987, EM-554, SM554, VFM105
 T1-R650	1/20	115	2.40	2.000"	3000	CCW	2"x5/16"x2.75"	2 Pin Plug Ring Term. Grnd.	Nutone, Broan 30080015

Shafts measured from front of stack to shaft end.

3.3" Diameter Motors

- Bilingual Packaging
- Sleeve Bearing Unless Indicated Otherwise

Part #	HP	Volts	Amps	RPM	Rot.	Type	Body	Shaft	Features	Cross Reference
 HM-R337	1/200	115	0.40	2/1550	CCW	SP/ Open	2.30"	1/4"x1.45"	2 Speed Motor Insulated Spade Ring Term. Grnd.	Hunter 902538
 O6-R261	1/170	115	0.33	1/1550	CW	SP/ TE	2.09"	5/16"x1.75"	2 Prong Plug	Reversomatic QB60-80
 O6-R401	1/165	115	0.35	1/1600	CCW	SP/ TE	2.09"	1/4"x1.5"	Conduit Sleeve Bare Wire Leads	Enterprise Fdry., SM401, 76401
 O6-R403	1/145	115	0.33	1/1550	CW	SP/ TE	2.75"	1/4"x1.50"	Mtr. On/Off Switch 72" Cord & 3 Prong Plug	Enterprise Fdry. 370122, Newmac, SM402, SM403, 76321
 R2-R410	1/130	115	0.35	1/1550	CW	SP/ Open	2.75"	5/16"x2.0"	L.K.Fitting-Int.Fan Bare Wire Leads	Enterprise Fdry. 379135, SM410, 76410
 O6-R215	1/115	230	0.22	1/1200	CCW	SP/ TE	2.09"	5/16"x2.25"	Triangular Brk. Front	Electric Unit Htrs. Chromalox 01513005, Thermolec.
 O6-R511	1/100	230	0.28	1/1350	CW	SP/ TE	2.1"	1/4"x2.0"	Shaft C-ring Groove Bare Wire Leads	Federal Pioneer Electric, Blanchard 79109, 79115
 O6-R260	1/80	115	0.65	1/1500	CCW	SP/ TE	2.09"	5/16"x1.1"	2 Prong Plug	Reversomatic B60
 O6-R265	1/75	115	0.65	1/1400	CW	SP/ TE	2.09"	5/16"x1.6"	2 Prong Plug	Reversomatic QB100
 HM-R489	1/70	115	0.74	3/1300	CW	SP/ Open	2.3"	3.0"x5/16"x3.8"	Control Wires	Elmira Woodstove
 O6-R500	1/70	115	0.66	1/1550	CCW	SP/ TE	2.35"	1/4"x2.0"	2 rear studs Bare Wire Leads	Tweed Steel 23197211, Franklin 76052, Fasco D122, D182
 HM-R250	1/65	115	0.50	2/1500	CCW	SP/ T.E.	3.7"	Hubless	2 Spd. Switch 3 Prong Plug	Selkirk

3.3" Motors Continued On Next Page

3.3" Diameter Motors

3.3" Motors Continued From Previous

Part #	HP	Volts	Amps	RPM	Rot.	Type	Body	Shaft	Features	Cross Reference
 O6-R264	1/60	115	0.68	1/1550	CW	SP/ TE	2.4"	5/16"x2.0"	2 Prong Plug	Reversomatic QK100
 R3-R350	1/55	115	1.2	2/1050	CW	SP/ Open	2.8"	5/16"x1.5"	Bare Wire Leads	Mark Hot 5AA1A3-P45, UE81, UE169, 5M404, 16404
 O6-R210	1/50	230	0.40	1/1550	CCW	SP/ TE	2.4"	1/4"x1.5"	Bare Wire Leads	Caloritech, SM210, 217, 76210, D624, SS210, CGE, 12519-002
 O6-R267	1/50	115	0.80	1/1550	CW	SP/ TE	2.25"	5/16"x1.5"	2 Prong Plug	Reversomatic BB100
 O6-R404	1/50	115	0.85	1/1550	CCW	SP/ TE	2.5"	5/16"x1.8"	Triangular Brk. Bare Wire Leads	Clawsey Sohrt, SM404, 76404
 R1-R133	1/40	115	1.0	2/1550	CCW	SP/ TE	2.6"	Hubless	Bare Wire Leads	Mark Hot 5DH1A1P456
 O6-R262	1/40	115	1.0	1/1550	CW	SP/ TE	2.4"	5/16"x1.5"	2 Prong Plug	Reversomatic B100, K100
 O6-R217	1/35	230	0.50	1/1450	CW	SP/ TE	2.4"	1/4"x1.20"		Chromalox 02188001,2, 76217, FPE L82116A4,5
 R3-R360	1/35	115	1.0	1/1550	CW	SP/ Open	2.5"	1/4"x1.6"	3 Studs Front	Keeprite 504249
 O6-R212	1/30	230	0.55	1/1550	CCW	SP/ TE	2.8"	5/16"x3.5"	Ball Bearing Triangular Brk.	Chromalox 01513002,3,10,11,16, SM212, 76212 SS212, Westcan A2001B, 7173-0951
 R2-R480	1/30	230	0.80	1/1500	CCW	SP/ Open	4.0"	3/8"x2.4"	4 Ears Each End Ins. Spade Term.	Chromalox/Westcan Unit Heaters
 O6-R213	1/25	115	1.40	1/1550	CCW	SP/ TE	3.1"	5/16"x1.7"	Triangular Brkt./ Box	Trane, Lincoln, Chromalox, SM213, SM302, 76213, SS213

3.3" Motors Continued On Next Page

Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

3.3" Diameter Motors

3.3" Motors Continued From Previous

Part #	HP	Volts	Amps	RPM	Rot.	Type	Body	Shaft	Features	Cross Reference
 R3-R316	1/25	115	1.40	1/1550	CCW	SP/ Open	2.7"	5/16"x1.35"	Ball Bearing 30" Wire Leads 7" Grnd. Stud Mounting	Air 2000 HRV
 R2-R303	1/25	115	1.40	1/1550	CCW	SP/ Open	3.8"	5/16"x3.3"	Ball Bearing Triangular Brkt/ Int.Fan Bare Wire Leads	Trane Unit Htr. 75270010, SM303, 76303, SS303
 O6-R266	1/20	115	1.65	1/1550	CW	SP/ TE	2.8"	5/16"x1.4"	2 Prong Plug	Reversomatic BK100
 O6-R400	1/20	115	1.7	2/1600	CCW	SP/ TE	2.85"	5/16"x1.6"	Ball Bearing Cooling Ring/ Cond. Box Bare Wire Leads	Canarm P1000-B4
 R3-R373	1/15	115	0.90	1/1400	CCW	PSC/ TE	4.50"	3/8"x3.25"	Plug 4/250 Cap Inc.	Dayton Greenhouse Fan, 7190-1004
 O6-R499	1/15	115	1.0	1/1625	CCW	PSC/ Open	4.55"	5/16"x2.3"	4 Studs Front 4/370 Cap.	Grainger 3M499B
 R3-R348	1/15	115	1.12	2/1550	CCW	PSC/ TE	4.1"	3/8"x3.35"	3 Ears/ Cap Inc. Pin & Ins. Spade Terms. Ring Term. Grnd.	Vanee HRV M1703
 O1-R465	1/15	115	2.25	3/1550	CCW	SP/ Open	4.0"	2.3"x5/16"x2.3"	Internal Fan Pin Terms. Ring term. Grnd.	Nutech-Lifebreath 23202, Elmira stoves, 2868-513-133,152
 R3-R334	1/15	115	2.30	1/3000	CCW	SP/ Open	4.25"	1/4"x1.50"	Ball Bearing Internal Fan Bare Wire Leads	Torrin 7627181, 7627221, 7627271, 7627291, Clare
 R2-R438	1/14	115	1.05	2/1600	CW	PSC/ Open	4.25"	5/16"x1.50"	3 Ears Mnt.	Venmar HRV 01038
 R2-R462	1/17	115	1.1	3/1660	CCW	PSC/ Open	4.0"	3.5"x3/8"x3.5"	2 Side Studs	Venmar HRV 02101
 R3-R366	1/7	115	1.7	3/1630	CW	PSC/ Open	4.75"	3.0"x3/8"x3.0"	2 Side Studs	Venmar HRV 02100
 R2-R422	1/6	115	2.9	3/1690	CW	PSC/ Open	4.90"	3/8"x2.0"	3 Ears	Venmar HRV 02209

4.1" Diameter Motors

Intercity

- 115 Volt, With Conduit Box
- Shaded Pole, Totally Enclosed



M3-R2609
Illustrated

Part #	HP	Amps	RPM	Rotation	Body	Frame	Bearing	Shaft	Cross Reference
M3-R2609	1/30	1.21	1/1550	CW	3.0"	4.1"	Sleeve	2.4"x1/2"	Intercity, UE 009
M3-R2612	1/30	1.21	1/1550	CCW	3.0"	4.1"	Sleeve	2.4"x1/2"	Intercity, UE 010

5.0" Direct Drive Motors

Direct Replacement For:

- Coleman • Carrier
- Lennox • York



M4-R2398
Illustrated



M4-R2368
Illustrated


42 Frame

- Shaded Pole & PSC


Part #	HP	Volts	Amps	Type	Cap.	RPM	Rot.	Body	Shaft	Cross Reference
M4-R2398	1/8	115	5.2	SP	-	3/1050	CCW	3.8"	3.8" x 1/2"	Fasco D178, D356, UE98
M4-R2390	1/5	115	3.2	PSC	7.5/370	3/1075	Rev.	3.9"	5.5" x 1/2"	York 24-22489-000, Bohn 5002L, 5003F
M4-R2368	1/5	115	3.5	PSC	4/370	4/1030	CCW	4.5"	3.5" x 1/2"	Direct Replacement For: Emerson 1268, Carrier HC37MA135, Lennox 328685, P8-9662, P8-3789, P8-3790, P8-3527, P8-3529, P8-4662, York 024-17903-703
M4-R2385	1/5	115	6.5	SP	-	3/1050	CCW	3.9"	5.5" x 1/2"	Fasco D158, UE385, UE390
M4-R2391	1/5	208/230	1.3	PSC	7.5/370	3/1075	Rev.	3.9"	5.5" x 1/2"	Fasco D262, D1016, UE515
M4-R2429	1/5	208/230	3.2	SP	-	3/1050	CCW	3.9"	5.5" x 1/2"	Fasco D318, UE429
M4-R2395	1/4	115	4.9	PSC	5/370	3/1075	Rev.	4.1"	4.5" x 1/2"	Fasco D150
M4-R2379	1/4	115	6.10	PSC	10/370	3/1075	CCW	4.5"	2.5" x 1/2"	Direct Replacement: York 024-17903-005, GE KCP29KK451BT
M4-R2679	1/4	115	10.0	SP	-	3/1050	Rev.	4.7"	2.2" x 1/2"	Direct Replacement: York 024-17903-005, GE KCP29KK451BT, Lennox, Carrier
M4-R2628	1/4	208/230	1.8	PSC	5/370	3/1075	Rev.	5.2"	2.5" x 1/2"	Fasco D151, UE391

All Above Motors Are Sleeve Bearing (Except R2379)

Mounting Brackets




92-A8617
Torsion Flex Bracket 5.0" and 5.5" Dia.

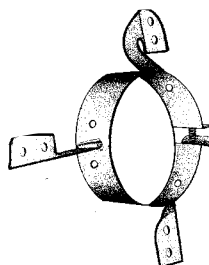

92-A8550
5" Diameter
92-A8555
5.5" Diameter

92-A8556
9" Bolt Circle

92-A8557
10" Bolt Circle
HEAVY DUTY
5.5" Diameter for
1/2 HP and above



5.5" Direct Drive - Torsion Flex Motors

Cross Reference

Rotom	AO Smith	Fasco	GE	Marathon	UE	Rotom
DD-034	FML1026	D1730	3783	X034	752	R40234, R42419
DD-044	-	D1733	3784	-	-	R42449
DD-035	FML1036	D1731	3785	X035	753, 947	R42035, R42319
DD-045	FM1036	D1734	3786	-	-	R42349
DD-036	FML1056	D1732	3787	X036	754	R42036, 42219
DD-046	FM1056	D1735	3788	-	-	R42249

**4 Speed
115 & 208/230 Volt!**



DD-044
Illustrated

**9" & 10"
Bolt
Circle**



48 Frame - Torsion Flex Mounting

Part #	HP	Volts	Amps	Cap.	RPM	Rotation	A Dim.	Bearing	Shaft
DD-034	1/4	115	3.6	5/370	4/1075	Revers.	3.40"	Sleeve	1/2"x6"
DD-044	1/4	208/230	1.7	5/370	4/1075	Revers.	3.40"	Sleeve	1/2"x6"
DD-035	1/3	115	4.8	10/370	4/1075	Revers.	4.30"	Sleeve	1/2"x6"
DD-045	1/3	208/230	2.3	10/370	4/1075	Revers.	4.30"	Sleeve	1/2"x6"
DD-036	1/2	115	8.2	10/370	4/1075	Revers.	4.85"	Sleeve	1/2"x6"
DD-046	1/2	208/230	3.8	10/370	4/1075	Revers.	4.85"	Sleeve	1/2"x6"

Capacitor Not Included

Features

- 48Y Frame
- 5.5" Diameter
- Open Enclosure
- Mounting: Flex
- 60 Hz
- Sleeve Bearing
- Shaft: 1/2" x 6"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 60" Coloured Electrical Leads
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

5.5" Direct Drive Motors

**24 Month
Warranty**



45°C Ambient



48 Frame

Part #	HP	Volts	Amps	Cap.	RPM	Rotation	A Dim.	Bearing	Shaft
DD-3583	1/4	115	4.4	5/370	3/1075	Revers.	4.04"	Sleeve	4.5" x 1/2"
DD-3584	1/4	208/230	1.7	5/370	3/1075	Revers.	4.04"	Sleeve	4.5" x 1/2"
DD-3585	1/3	115	6.0	5/370	3/1075	Revers.	4.28"	Sleeve	4.5" x 1/2"
DD-3586	1/3	208/230	2.6	5/370	3/1075	Revers.	4.28"	Sleeve	4.5" x 1/2"
DD-3587	1/2	115	7.8	10/370	3/1075	Revers.	5.31"	Sleeve	4.5" x 1/2"
DD-3588	1/2	208/230	3.6	7.5/370	3/1075	Revers.	5.31"	Sleeve	4.5" x 1/2"
DD-3589	3/4	115	10.5	15/370	3/1075	Revers.	5.61"	Sleeve	4.5" x 1/2"
DD-3590	3/4	208/230	4.6	10/370	3/1075	Revers.	5.61"	Sleeve	4.5" x 1/2"

Capacitor Not Included

Features

- 48Y Frame
- 5.5" Diameter
- Open Enclosure
- Mounting: Stud, Strap & Base (Resilient Rings)
- 60 Hz
- Sleeve Bearing
- Shaft: 4.5" x 1/2"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 60" Coloured Electrical Leads
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

Cross Reference

Rotom	HP	Voltage	AO Smith	Diversitech	Emerson	Fasco	Embraco	GE	Marathon	UE	Rotom
DD-3583	1/4	115	DL1026	WG840583	1863	D721	E201	3583	X000	533	R43583
DD-3584	1/4	208/230	D1026	WG840584	1971	D725	E202	3584	X001	530	R43584
DD-3585	1/3	115	DL1036	WG840585	1864	D727	E203	3585	X002	532	R43585
DD-3586	1/3	208/230	D1036	WG840586	1972	D923	E204	3586	X003	529	R43586
DD-3587	1/2	115	DL1056	WG840587	1865	D701	E205	3587	X004	531	R43587
DD-3588	1/2	208/230	D1056	WG840588	1973	D703	E206	3588	X005	528	R43588
DD-3589	3/4	115	DL1076	WG840589	8904	D728	E207	3589	X009	678	R43589
DD-3590	3/4	208/230	D1076	WG840590	8905	D729	E208	3590	X010	679	R43590

Applications:

Residential & commercial furnaces, air conditioning units and other fan / blower applications.

5.5" Direct Drive Motors

- Less Inventory Required!
- Versatile!
- Time Saver!
- Easy Installations!

***Trip Savers
Multiple HP's
1 Motor!***



R6-R43600
Illustrated

Heavy Duty Torsion Bracket

Fits 5.5" Diameter for 1/2 HP and above applications.


- Easy to install.
- Fits York, Lennox, Keeprite, Olsen, Rheem-Ruud, Miller & Janitrol.

92-A8556

9" Bolt Circle

92-A8557

10" Bolt Circle



***Open Drip-proof
40°C Ambient***

Features

- Energy Efficient
- Different Capacitor/Speed Combos
- Designed for 370V Cap (not incl.)
- Permanent Split Capacitor
- Ball and Sleeve Bearing
- Reversible Rotation
- Resilient Rings
- Extended Thru Bolts
- Automatic Protector
- Class B Insulation
- 48 Frame
- Single Phase
- Continuous Duty-Over Air
- Mounts by Belly Band, Thru Bolts or Shell Holes
- Rheem Mounting Holes in Shell
- 60 Hz

48 Frame - Multi-Horsepower

Part #	HP	Spd.	RPM	Volt	Amps	Capacitor (370V)			Bearing	Leads	Dia	Shaft
R6-R43600	1/2	All	1075	115	7.0	10 mfd			Sleeve	26"	4.86"	1/2"x5"
	1/3	All			6.7	5	mfd	7.5*				
	1/4	Lo, Med-Lo, Med-Hi			4.4							
	1/5	Low, Med-Lo			3.2							
	1/6	Lo			2.4							
R6-R43601	1/2	All	1075	208-230	3.9	10 mfd			Sleeve	26"	4.86"	1/2"x5"
	1/3	All			3.6	5	mfd	7.5*				
	1/4	Lo, Med-Lo, Med-Hi			2.5							
	1/5	Lo, Med-Lo			1.8							
	1/6	Lo			1.3							
R6-R43602	3/4	All	1075	115	9.1	10 mfd			Ball	38"	4.86"	1/2"x5 1/2"
	1/2	All			6.8	5	mfd	7.5*				
	1/3	All			5.5							
	1/4	Lo, Med-Lo, Med-Hi			3.0							
	1/5	Lo, Med-Lo			2.3							
R6-R43603	3/4	All	1075	208-230	3.9	10 mfd			Ball	38"	4.86"	1/2"x5 1/2"
	1/2	All			3.6	5	mfd	7.5*				
	1/3	All			3.0							
	1/4	Lo, Med-Lo, Med-Hi			2.3							
	1/5	Lo, Med-Lo			2.0							

* Motor approximately 10% stronger & has higher starting torque for 1/6, 1/5, 1/4 & 1/3 HP rating with the 7.5 mfd 370VAC capacitor.

5.0" Fan Coil Motors

CROSS REFERENCE: UE & Tempspec DE3E142N

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rot.	Body	Frame	Bearing	Shaft
M4-R2197	1/14	115	1.25	PSC/ Open	7.5/370	3/820	CCW	3.8"	5.0"	Sleeve	3.4"x1/2"
M4-R2198	1/14	115	1.25	PSC/ Open	7.5/370	3/820	CCW	3.8"	5.0"	Sleeve	3.4"x1/2"



M4-R2198
Motor Only




M4-R2197
With 92-A8551 8.37" bracket

CROSS REFERENCE: M4-R2194 Tempspec DE3E141N
M4-R2195 Tempspec DE3F056N
M4-R2196 Tempspec DE3G110N

9" or 10" Bolt Circle

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rot.	Body	Frame	Bearing	Shaft
M4-R2194	1/14	115	1.25	PSC/ Open	7.5/370	3/820	CCW	4.0"	5.0"	Sleeve	3.4"x1/2"
M4-R2195	1/12	115	2.10	PSC/ Open	7.5/370	3/740	CCW	4.6"	5.0"	Sleeve	3.4"x1/2"
M4-R2196	1/8	115	2.50	PSC/ Open	7.5/370	3/850	CCW	4.5"	5.0"	Sleeve	3.9"x1/2"



M4-R2195
Illustrated


Fan Coil Motors

Heating & Air Conditioning • High Rise Apartment • Condominium • Hotel
ONE MOTOR DOES ALL THREE! Bedroom, Living Room, Common Area.

3 IN 1

• 1/8 HP • 1/10 HP • 1/12 HP
• 1000 RPM • 115V • 5 Speed

CROSS REFERENCE: UE799, L350, L450, L600, UE DA3E200, DA3F100, DA3G142, R2299

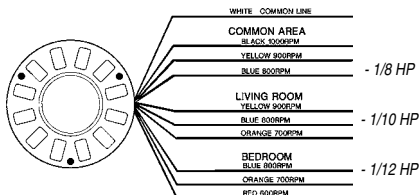

Wiring Diagram

Part #	HP	Amps	Cap.	RPM	Body	Shaft
DD-029	1/8	2.10	Inc.	5/1000	3.61"	1/2"x5.0"
DD-030	1/6	2.6	5/370 Inc.	5/950	3.57"	1/2"x4.5"

Direct Replacement For:

• Climetec • Snyder-General • Tempspec • Unilux



5KCP39DGV279S

Fan Coil Blowers

Part #	CFM	"A" Dim.
66-RFC300	300	6.75"
66-RFC400	400	8.25"
66-RFC600	600	9.0"

Applications

- Heating & Air Conditioning
- High Rise Apartment
- Condominium
- Hotel



66-RFC600
Illustrated
Motors Sold Separately

Thermo Aqua Stats

Replaces

- Unilux
- Tempspec • Climetec
- Snyder-General

Part #	Description	Specifications	Wires	X-Ref.
18-DT2-85	3 Wire Change Over Thermostats	Opens 83° Closes 65°	2 term. Heating Only 54" x 5/8" mount.	37T31
18-DT3-85			3 term. Heating & Cooling 54" x 5/8" mount.	37T33

18-DT3-85
Illustrated



4.0" Diameter - Electric Unit Heater Motors

115 Volt • Open • CCW Lead End Rotation

Cross Reference: Magnetek #78

Part #	HP	Amps	RPM	Shaft
M3-R2614	1/12	2.25	1550	2.0" x 3/8"



5.0" Diameter - OEM Replacement

OEM Direct Replacements • Totally Enclosed • 115 Volts • 42 Frame

Cross Reference:

Direct Replacement for Reznor, Luxaire, *Lennox P8-6920, *Keeprite 54028, A0516, A2160, E62788, E62862, E62A15, *Robbin Myers.

Part #	Fig.	HP	RPM	Type
M4-R6920*	A	1/15	1050	SP
T2-R2360	B	1/15	1050	SP
T2-R2615	B	1/8	1050	SP
T2-R2380	C	1/8	1075	PSC



Fig. B
Reznor


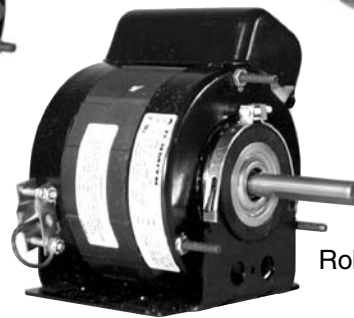


Fig. C
Robbin Myers
Reznor

Fig. A
Lennox *
ICP
Keeprite

5.5" Diameter Unit Heater Motors

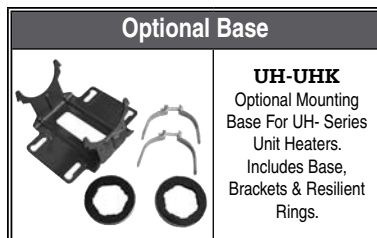

UH-9035
Illustrated

**Ball
Bearing**

Features

- 48 Frame
- 5.5" Diameter
- Totally Enclosed
- Mounting: 4/8 Stud. Pattern
- 60 Hz
- Ball Bearing
- Shaft: 1/2" x 3.4"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 40" Black Water Resistant SJOW Cord
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

Unit Heater 

Part #	HP	Volts	Amps	Cap.	RPM	Rotation	A Dim.	Bearing	Shaft
UH-9034	1/6	115	2.4	4/370	1/1075	Revers.	4.55"	Ball	1/2"x3.4"
UH-9035	1/4	115	4.1	5/370	1/1075	Revers.	4.52"	Ball	1/2"x3.4"
UH-9036	1/3	115	5.0	7.5/370	1/1075	Revers.	4.52"	Ball	1/2"x3.4"

Capacitor Included

Cross Reference

Rotom	AO Smith	Emerson	Fasco	GE	Marathon	UE
UH-9034	UH1016, US1016, US1016NB	9034	D834	3206	X302, X306	177, 749
UH-9035	UH1026, US1026, US1026NB	9035	D734	3208	X303, X307	566, 734, 750
UH-9036	UH1036, US1036, US1036NB	9036	D732	3212	X304, X308	183, 751

Belted Fan Motors

**Ball Bearing
Commercial Ventilation!**
BF-4707 (1/3 HP)
BF-4709 (1/2 HP)



BF-4706
Illustrated

Rotom
PLUS+

Features

- 48 Frame
- 5.5" Diameter
- Open Drip Proof
- Resilient Ring & Base Included
- 60 Hz
- Ball & Sleeve Bearing
- Shaft: 1/2" x 1.5" W/ Flat
- Reversible
- Split Phase
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

Belted Fan

Part #	HP	Volts	Amps	S.F.	RPM	Rotation	A Dim.	Bearing	Shaft
BF-4701	1/4	115	5.8	1.35	1/1725	Revers.	6.25"	Sleeve	1/2"x1.5"
BF-4706	1/3	115	7.3	1.35	1/1725	Revers.	6.25"	Sleeve	1/2"x1.5"
BF-4707	1/3	115	7.3	1.35	1/1725	Revers.	6.25"	Ball	1/2"x1.5"
BF-4708	1/2	115	9.9	1.25	1/1725	Revers.	6.75"	Sleeve	1/2"x1.5"
BF-4709	1/2	115	9.9	1.25	1/1725	Revers.	6.75"	Ball	1/2"x1.5"



Cross Reference

Rotom	AO Smith	Emerson	Fasco	GE	Marathon	UE	Rotom
BF-4701	GF2024	840CV	D6002	4701, H701	D127, B206, B303	-	R840
BF-4706	GF2034	841CV	-	4706, H711	D143, B207	-	R841
BF-4707	GF2034B	2888	D6004	4682, H165	B305, B703	906, 921, 922	R2888
BF-4708	GF2054	1542C	-	4708	D162, B208	-	R1542
BF-4709	-	2887	D6006	4684, H703	B307	-	R2887

Two Speed

Part #	HP	Volts	Amps	S.F.	RPM	Type	C Dim.	Fr.	Bearing	Shaft
T5-R5793	1/3	115	6.7	1.35	2/1725	SPLT/ ODP	8.30"	56Z	Sleeve	1/2"x1.6"
T5-R5794	1/2	115	9.4	1.35	2/1725	SP/ Open.	8.30"	56Z	Sleeve	1/2"x1.7"

*5/8" Thru-bolts shaft end.




Part #	Cross Reference
T5-R5793	Emerson 5793, K5793, U.E. 849, G.E. 5J765GS
T5-R5794	Emerson 5794, 5J767GX, Franklin71009, 1105460, UE 850

Oil Burner

- Residential and Commercial
- 115 Volt • Reversible • Split Phase

Part #	HP	RPM	Frame
T4-R6102	1/8	1725	48N
T4-R2097	1/8	3450	48N
T4-R3083	1/7	3450	48M
T4-R3250	1/6	1725	48N
T4-R3251	1/6	3450	48M
T4-R3579	1/4	1725	48N
T4-R2302	1/4	3450	48N
T4-R2303	1/3	1725	48N

T4-R2097
Illustrated

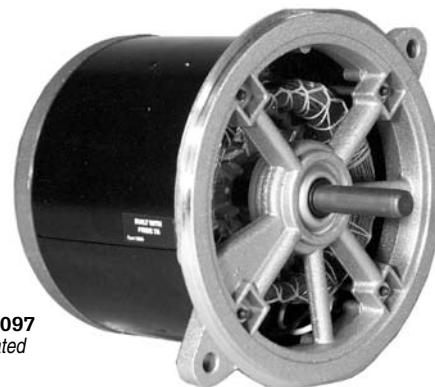

Oil Burner - Beckett PSC Motor

- More Reliable
- Fewer Service Calls
- 4 Year Warranty
- 48 M Frame

Cross Reference: Beckett 21805U

Part #	HP	Volts	Type	RPM	Rotation
T4-R21805U	1/7	115	PSC	3450	CCW



Armstrong / B&G Direct Replacement

Single Shaft • Single Speed • Sleeve & Ball Bearing • 1725 RPM

115/230/460/575 Volts • Resilient Rings for Base Mount Models • Open Construction • Reversible

Typical Applications : Hot Water Boiler & Booster Pumps

**Sleeve Bearing
Models Feature
Easy Access
Oilers!**



Fig. 1

CP-R1350
Illustrated



Fig. 2

CP-R1444
Illustrated



Fig. 3

CP-R1373
Illustrated



Fig. 4

CP-R1359
Illustrated




Fig. 5

CP-R1463
Illustrated



Fig. 6

CP-R1471
Illustrated

Part #	HP	Volts	Fig.	Bearing	Armstrong	B & G
CP-R1350	1/12	115	1	Sleeve	805316-010, 831000-61	111034
CP-R1352	1/6	115	1	Sleeve	817025-001, 831001-061	111031
CP-R1354	1/4	115	1	Sleeve	817025-007, 831002-061	111040
CP-R1444	1/4	115	2	Sleeve	816141-001	
CP-R1356	1/3	115	1	Sleeve	817025-013, 831003-061	111042
CP-R1446	1/3	115	2	Sleeve	816141-002	
CP-R1359	1/2	115/230	4	Ball	831009-061	111044
CP-R1368	1/2	230/460	3	Ball	811757-003, 020, 023, 831011-083	111046
CP-R1369	1/2	575	3	Ball	811757-004	111046-5
CP-R1459	1/2	115/230	5	Ball	811757-001	111044
CP-R1362	3/4	115/230	4	Ball	831010-062	111047
CP-R1370	3/4	230/460	3	Ball	831012-083	111049
CP-R1372	3/4	575	3	Ball	811757-006	111049-5
CP-R1462	3/4	115/230	5	Ball	811757-002, 033	111047
CP-R1470	3/4	230/460	6	Ball	811575-005	111049
CP-R1472	3/4	575	6	Ball	811757-005, 024, 027	111049-5
CP-R1363	1	115/230	4	Ball	816676-062	111050
CP-R1371	1	230/460	3	Ball	816675-069	169090
CP-R1373	1	575	3	Ball	816676-068	169090-5
CP-R1463	1	115/230	5	Ball	811757-007, 028, 031	111050
CP-R1471	1	230/460	6	Ball	811757-008	169090
CP-R1473	1	575	6	Ball	811757-009, 028, 031	169090-5
CP-R1365	1 1/2	115/230	4	Ball	816678-062	169095
CP-R1374	1 1/2	230/460	3	Ball	816678-069	169092
CP-R1375	1 1/2	575	3	Ball	816685-068	196092-5

Pump Couplers

Easy Links - Spirolink



T6-10010
Illustrated



T6-10034
Illustrated

Part#	Specification	Description
T6-10010	1/2" x 1/2"	1/2 to 1/3 HP Easy Link
T6-10010SL	1/2" x 1/2"	Spirolink
T6-10023	1/2" x 1/2" or 1/2" x 5/8"	1/2 to 3/4 HP Easy Link
T6-10023SL	1/2" x 1/2" or 1/2" x 5/8"	Spirolink
T6-10034	1/2" x 5/8" or 5/8" x 5/8"	1 HP Easy Link
T6-10034SL	1/2" x 5/8" or 5/8" x 5/8"	Spirolink
T6-10045SL	1/2" x 5/8" or 5/8" x 5/8"	Taco

Amana CUIC Mid Efficiency

Residential: 11009001, 11009002, Fasco 7021-9064, A129

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB129	1/20	120	1.95	SP/ Open	1/3250	CCW	7.0"	3.3"	Sleeve

FB-RFB129 Comes with gasket.



Amana High Efficiency Furnace Model 9552099437

Residential: Amana D98686-5, R0156744, 20000101, Fasco 7002-2407, 7021-8258, 7062-3151

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB158	1/25	120	0.7	PSC/ Open	4/250 Inc.	1/3450	CCW	6.4"	3.3"	Sleeve



Amana Furnace Mid Efficiency

Residential: Amana D69964-5, 7021-8252, R0156859, 20044401, Fasco 7002-2407

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB160	1/30	120	1.6	SP/ Open	1/3000	CCW	6.0"	Skel.	Ball



American Air Filter Incremental

Cross Reference: 7184-0354

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2622	1/6 - 1/12	115	3.20	PSC/ Open	5/370 Inc.	4/1550	Rev.	4.0"	5.0"	Sleeve	7.40"x1/2"x7.40"



Cross Reference: 7124-0103

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2677	1/5-1/10	115	2.8	PSC/ Open	5/370 Inc.	3/1625	CCW	3.55"	5.5"	Sleeve	8.55"x1/2"x8.5"



Cross Reference: American Air Filter, Singer, Climate Control 02024224 (Evaporator)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2675	1/30	208/230	0.4	PSC/ Open	2/370 Inc.	4/1075	CCW	3.8"	4.75"	Sleeve	7.7"x1/2"x7.7"



Cross Reference: American Air Filter 141 (Condenser)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2375	1/20	230	1.0	SP/ Open	1/1000	CW	2.9"	42	Sleeve	2.5"x1/2"



Armstrong-Johnson Air Ease High Efficiency Ultra 90, 290

Residential: 40404-003G-004, 40404-004, 2862-513-040, 367170004

Amana 20190601, Fasco 7021-9625

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB547	1/20	120	1.80	SP/ Open	1/3400	CW	5.8"	3.3"	Ball



Armstrong-Johnson Air Ease Mid Efficiency Ultra 80

Residential: 40425-002

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB425	1/25	120	1.4	SP/ Open	1/3000	CW	5.8"	3.3"	Sleeve



Armstrong Johnson, Magic Chef, Air Ease, Olsen Roof Top

Commercial: Armstrong 203884300, 203884B002

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB203	1/20	208/230	0.9	SP/ Open	1/3000	CCW	8.5"	3.3"	Ball



Carrier, Bryant, Payne Mid Efficiency Residential Furnace

Residential: HC21ZE117-13, 318984-753, 818984753, 58SSE08Q-BC Series 130

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Wheel
FB-RFB212	1/30	120	1.60	SP/ Open	1/3000	CCW	6.3"	Skel.	Ball	66-A8664

FB-RFB212 Comes with 2 wiring harnesses.



Carrier General Replacement

Commercial: Magnetek 571, Carrier HC24AU700, UE571 (RFM4)
Magnetek 570, UE570, Fedders S1900047003 (RFM5)
Magnetek 433, FM-RFM433 (UE-433)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM4	1/20	115/230	2.2/1.1	SP/ Open	1/3000	CW	6.5"	3.3"	Ball	2.3"x1/4"	66-A8655
FM-RFM5	1/20	115/230	2.1/1.1	SP/ Open	1/3000	CCW	6.5"	3.3"	Ball	2.3"x1/4"	66-A8655
UE-433	1/20	115/230	.71/.38	PSC/ Open	1/1550	Rev.	6.4"	3.3"	Ball	4.25"x1/4"	-

FM-RFM4, FM-RFM5 & UE-433 Come with 5/16" shaft adapter. Built in centrifugal switch.



Carrier General Replacement

Commercial: Magnetek 66, York, U660 (RFM3)
Magnetek 653 (RFM653)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM3	1/16	230/460	.44/.22	SP/ Open	1/3000	CCW	6.2"	3.3"	Ball	2.3"x1/4"	66-A8655
FM-RFM653	1/16	230/460	1.2/.6	SP/ Open	1/3000	CW	6.6"	3.3"	Ball	2.3"x1/4"	66-A8650

FM-RFM3 & FM-RFM653 Comes with 5/16" shaft adapter. Built in centrifugal switch.



Carrier Roof Top

Commercial: Carrier HC680001B, York 024-24115-001, 701

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM680	1/16	115-230	1.0/0.5	PSC/ Open	7.5/370 Inc	1/3450	Rev.	7.0"	3.3"	Ball	1.2"x1/4"	66-A8660 (4"x1") 66-A8665 (4"x2")

FM-RFM680 comes with 5/16" bushing. Built in centrifugal switch.



Carrier 7½ Ton & Up, 48TJE 90/120/150 Commercial Roof Top Units

Commercial: Carrier HC30GB232, JF1H092N (FM-RFM232)
Carrier HC30GB460 (FM-RFM462)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM232	1/16	208/230	0.55	PSC/ Open	4/370 Inc.	1/3450	CW	5.0"	3.3"	Ball	2.85"x5/16"	66-A8660 (4"x1")
FM-RFM462	1/16	460	0.30	PSC/ Open	4/370 Inc.	1/3450	CW	4.75"	3.3"	Ball	3.3"x5/16"	66-A8665 (4"x2")

The rear magnetic centrifugal switch found on most replacements has been built inside of the Rotom FM-RFM232 & FM-RFM462 models.



Cooling Fan Kits

Part #	Rotation	Kits Description
92-FMK	CW	• 1 ¾" Diameter. • 5/16" Hub I.D. with 1/4" adapter.
92-FMK1	CCW	• (4) Spacers, (4) 10/32 & (4) 8/32 nuts.

92-FMK1
Illustrated



Carrier Residential Furnace (High Efficiency)

Residential: Carrier HC680001, HC27VE12, V579, V580, UE580, JA1P053N, Bryant P251-2307

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM580	1/20	115	1.9	SP/ Open	1/3000	CCW	3.5"	3.3"	Sleeve	1.9"x5/16"



Chromalox Incremental Evaporator Motor (1 Phase)

Cross Reference: Chromalox 07589, GE 7J399GX, Marathon 48S17D1240

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
M1-R52170	1/4	208/230	2.1	SP/ ODP	1/1725	Rev.	7.0"	48	Sleeve	5.5"x1/2"x5.5"



Chromalox Incremental Evaporator Motor (42 Frame)

Cross Reference: Chromalox Incremental 807-101, DE2E106N

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M3-R2671	1/10	208/240	0.6	PSC/ Open	3/370 Inc.	3/1610	CCW	3.09"	5.0"	Sleeve	8.65"x1/2"x8.66

Cross Reference: Chromalox Incremental 01103-100, UE CE3E001N

Chromalox Incremental 01103-202, UE DE3D427N

Chromalox Incremental 01103-201, UE DE3E102N

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2639	1/20	208/240	0.42	PSC/ Open	3/370 req.	2/1075	CW	3.34"	5.0"	Sleeve	1.95"x1/2"
M4-R2928	1/12	208/230	0.60	PSC/ Open	3/370 req.	1/1000	CCW	3.09"	5.0"	Sleeve	2.45"x1/2"
M4-R2929	3/16	208/230	1.30	PSC/ Open	4/370 req.	1/1050	CW	3.34"	5.0"	Sleeve	2.45"x1/2"




M3-R2928
Illustrated

Clare Mid Efficiency MEG Series

Residential: Clare V17, Fasco 7130-0029

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB17	1/15	120	2.0	SP/ Open	1/3000	CCW	6.9"	3.3"	Sleeve



Clare High Efficiency

Residential: Clare V17, M046

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM12	1/15	115	2.0	SP/ Open	1/3100	CCW	4.4"	3.3"	Sleeve	1.3"x5/16"



Clare

Residential: Clare V15, Internal Fan, M045, 2862511004

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM11	1/20	115	1.80	SP/ Open	1/3100	CCW	3.6"	3.3"	Sleeve	1.5"x5/16"



Clare Consolidated CHU 54-3, 73-3 High Efficiency

Residential: 4246100, 420950 Fasco 7021-9087, JAIN107NS

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB140	1/49	120	1.4	SP/ Open	1/3400	CCW	5.6"	3.3"	Sleeve



Clare Consolidated CHU 90-3, 108-5, 126-5 High Efficiency

Residential: 4246101, Fasco 7062-9064

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB130	1/18	120	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	5.0"	3.3"	Sleeve



Coleman - Dornback High Efficiency G90

Residential: 2940391P, UE94456, Fasco 7021-6759, 7021-5478

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB391	1/25	120	1.30	SP/ Open	1/3200	CCW	6.0"	3.3"	Sleeve



Coleman - Evcon Roof Top

Commercial: Evcon 2702-321, 7021-9404

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB156	1/50	115	1.1	SP/ Open	1/3000	CCW	5.60"	3.3"	Sleeve



Dundas Foundry Cooler Greenhouse Blower

Commercial: Fasco D500, Dundas Foundry Cooler Blower Fan, UE9492

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB500	1/30	115	1.1	SP/ Open	1/2860	CCW	5.5"	3.3"	Sleeve



Ducane, Lennox Air-Flo High Efficiency (New) MPG50B3, 75B3, B4, 100B4, 100B5, 125B5

Residential: 20093601, 20282002

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB936	1/60	120	1.1	SP/ Open	1/2800	CCW	6.4"	3.3"	Sleeve



Ducane, Lennox Air-Flo High Efficiency (Old) CMPA50U2A, 75U2A, 100U2A, 125U2A

Residential: 20054001, 20000101

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB540	1/10	120	0.7	PSC/ Open	4/370 Inc.	1/3450	CCW	6.5"	3.3	Sleeve



Ducane, Lennox Air-Flo High Efficiency (New) CMPB50U2 - 50U3, 75U2 - 75U3

Residential: 20282001

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB282	1/16	120	1.1	SP/ Open	1/3000	CCW	7.63"	3.3"	Sleeve



Flame Master HFM Mid Efficiency

Residential:

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB111	1/25	120	1.2	SP/ Open	1/3000	CCW	6.0"	3.3"	Sleeve



Goodman-Janitrol GNP Mid Efficiency

Residential: B1859005

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB185	1/35	120	1.30	SP/ Open	1/3000	CW	5.8"	Skel.	Sleeve

FB-RFB185 Comes with gasket.



Goodman-Janitrol GNPS, High Efficiency

Residential: B28330-01, JAIN107NS

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB140	1/49	120	1.4	SP/ Open	1/3400	CCW	5.6"	3.3"	Sleeve



Goodman Roof Top

Additional OEM on Page 2

Commercial: Goodman 82959000, Fasco 7021-8656

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB162	1/50	208/230	0.5	SP/ Open	1/3000	CW	8.5"	3.3"	Sleeve

FB-RFB162 Built in end switch.



Grimsby SC-OLV-1-2 Mid Efficiency

Residential: SBC375, CPL1132

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB111	1/25	120	1.2	SP/ Open	1/3000	CCW	6.0"	3.3"	Sleeve



General Replacement - Fasco

Commercial: Fasco D410, D409, D412, Reznor

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM410	1/10	115/230	1.5/0.7	PSC/ Open	7.5/370	1/3000	Rev.	7.1"	3.3"	Ball	3.7"x1/4"

FM-RFM410 Comes with 5/16" shaft adapter. Built in centrifugal switch.



General Replacement

Commercial: Franklin 80137, Fasco D406, 408 (FM-RFM2)

EJ Walsh 8211910172, Fedders (FM-RFM10)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM2	1/35	115/230	1.30/.65	SP/ Open	1/3000	CCW	5.8"	3.3"	Ball	3.9"x5/16"
FM-RFM10	1/35	115/230	1.2/0.6	SP/ Open	1/3000	CW	5.6"	3.3"	Ball	3.9"x5/16"

FM-RFM2 & FM-RFM10 Feature an internal fan, stainless steel shaft and built in centrifugal switch.



FM-RFM2
Illustrated

General Replacement

Commercial: Magnetek 371 (UE-371)

Magnetek 374 (UE-374)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
UE-374	1/8	115	1.8	PSC/ Open	4/370 Inc.	1/3000	Rev.	6.5"	3.3"	Ball	3/4"x1/4"
UE-371	1/8	208/230	0.89	PSC/ Open	4/370 Inc.	1/3000	Rev.	6.5"	3.3"	Ball	3/4"x1/4"

UE-371 & UE-374 Include 5/16" shaft adapter. Built in centrifugal switch.



UE-374
Illustrated

G.S.W. - John Woods Water Heater

Additional OEM on Page 2

Cross Reference: GSW 63172, 63418, Fasco 7021-8247

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB127	1/20	115	1.30	SP/ Open	1/3200	CCW	12.5"	3.3"	Sleeve

FB-RFB127 Includes Coupling



FB-RFB127

ICP - Heil-Quaker Roof Top

Additional OEM on Page 2

Commercial: Heil-Quaker HQ1050144, Fasco A151, A.O. 776, Whirlpool, 1170870

Part #	HP	Volts	Amps	Type	RPM	Rotation	A Dim	Frame	Bearing
FB-RFB105	1/50	230	0.40	SP/ Open	1/3200	CW	2.75"	3.3"	Ball



ICP - Keeprite, Heil, Comfortmaker NTGM High Efficiency


Residential: 1009924, 1009518, 1010527, 1011404, 1011412, 1164280, Airco, Tempstar

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB145	1/25	120	0.70	PSC/ Open	4/250 Inc.	1/3450	CW	5.3"	3.3"	Ball

FB-RFB145 Comes with coupling.

Vent Restrictor Orifice Plates

92-1008696 ICP 50 & 75	92-1008699 ICP 100	92-1160415 ICP 125
-------------------------------	---------------------------	---------------------------



Coupling
Included

Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

ICP - Keeprite, Heil, Comfortmaker NTC Mid Efficiency

Residential: 1010324, 1708607, 1010975, Airco, Tempstar

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB134	1/25	120	1.50	SP/ Open	1/3000	CCW	6.0"	3.3"	Sleeve

Residential: 1094073-74, 1010239

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB141	1/65	115	1.00	SP/ Open	1/2800	CCW	6.0"	3.3"	Ball



FB-RFB134
Illustrated

ICP 7½ Ton & Up, PGE 90/120/150 Roof Top Units

Commercial: ICP 1171348, JF1H092N (FM-RFM232)

ICP 1171347 (FM-RFM462)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM232	1/16	208/230	0.55	PSC/ Open	4/370 Inc.	1/3450	CW	5.0"	3.3"	Ball	2.85"x5/16"	66-A8660 (4"x1")
FM-RFM462	1/16	460	0.30	PSC/ Open	4/370 Inc.	1/3450	CW	4.75"	3.3"	Ball	3.3"x5/16"	66-A8665 (4"x2")

The rear magnetic centrifugal switch found on most replacements has been built inside of our Rotom FM-RFM232 & FM-RFM462 models.



ICP - Keeprite Condenser Motor Hotel Season Incrementals

Cross Reference: Keeprite Hotel Season Incremental 128576

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M2-R22576	1/9	208/230	0.6	PSC/ TE	3/370	2/1060	CW	3.8"	48	Sleeve	2.3"x1/2"

Cross Reference: Keeprite 130784

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M1-R784	1/20	208/230	0.4	PSC/ Open	4/370	3/1060	Rev.	3.5"	5.5"	Sleeve	2.3"x1/2"



ICP - Keeprite CGJ, CGK High Efficiency 50, 75, 100, 125

Residential: 1011350

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB350	1/25	115	0.8	PSC/ Open	5/370 Inc.	1/3450	CW	7.10"	3.3"	Ball



Hardware Connection Kit

FB-RFB350-1

ICP - Keeprite CUGE, CPGE, CULE, MGH Mid Efficiency

Residential: 1006168

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB68	1/50	115	0.9	SP/ Open	1/3000	CCW	5.25"	3.3"	Sleeve

FB-RFB68 Comes with 2 gaskets, high temp. silicone & instructions.



ICP - Intercity Condo & Apartment Exhaust Fan Motor

Cross Reference: UE009 (R2609), UE010 (R2612)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
M3-R2609	1/30	115	1.21	SP/ TE	1/1550	CW	3.0"	4.1"	Sleeve	2.4"x1/2"
M3-R2612	1/30	115	1.21	SP/ TE	1/1550	CCW	3.0"	4.1"	Sleeve	2.4"x1/2"



M3-R2609
Illustrated

ICP - Keeprite, Heil, Comfortmaker RGB Series Roof Top

Commercial: 501493

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB9	1/12	208/230	1.1	SP/ Open	1/3000	CCW	10.0"	3.3"	Ball



ICP - Keeprite PGB, PGA, PGD, GPD, RGMA

Commercial: Keeprite 1097245 15-20-30 Ton

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB107	1/40	208/230	0.3	PSC/ Open	3/370	2/3350/2900	CW	8.70"	3.3"	Sleeve

FB-RFB107 Comes with gasket.



ICP - Keeprite Roof Top RGA, RGAA

Commercial: Keeprite 1050144, JA1M109NS, Heil Quaker, Intercity, HQ1050144, Whirlpool, A151, A.O. 776

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB105	1/50	230	0.40	SP/ Open	1/3200	CW	5.72"	3.3"	Sleeve



ICP - Keeprite Roof Top RGA Series

Commercial: 50415K, 504015K

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM504	1/200	208/230	0.25	SP/ Open	1/3000	CCW	4.9"	Skel.	Sleeve	0.8"x1/4"	93-31042(2") 93-41042(4")

FM-RFM504 Comes with 5/16" shaft adapter. Built in centrifugal switch.



ICP - Keeprite Roof Top

Commercial: 501493

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM9	1/15	208/230	1.1	SP/ Open	1/3000	CCW	6.4"	3.3"	Ball	2.8"x5/16"	66-A8610

FM-RFM9 Built in centrifugal switch.



Johnson, Airease, Majic Chef Furnace

Residential: 3855C1, 3855C3, 8973C1, Franklin80280

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB6	1/60	230	0.55	SP/ Open	-	1/3000	CW	6.1"	3.3"	Ball

FB-RFB6 2" Wheel.



Lennox Additional OEM on Page 2

Residential: Lennox 46K4101, Fasco 7021-9593

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB164	1/50	115	0.8	SP/ Open	1/3000	CW	5.8"	3.3"	Sleeve

FB-RFB164 Features Aire Tube Fitting.



Lennox G26 High Efficiency Series

Residential: 68K21, Fasco 7021-9450

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB547	1/20	115	1.80	SP/ Open	1/3400	CW	5.8"	3.3"	Ball



Lennox G24 Mid Efficiency

Residential: 43K41

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB43	1/50	115	0.80	SP/ Open	1/3000	CW	5.8"	3.3"	Sleeve



Lennox GCS Roof Top

Commercial: Lennox 23G8101, 135327, 074, 28G6601, Fasco 7062-1794, 7062-3577

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB101	1/12	208/230	0.5	PSC/ Open	3/370 Inc.	1/3200	CCW	3.3"	8.25"	Ball

FB-RFB101 Comes with gasket. Built in centrifugal switch.



Lennox Roof Top

Commercial: Lennox 98G8701

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Frame	Body	Bearing
FB-RFB701	1/10	208/230	0.6	PSC/ Open	4/370 Inc.	1/3200	CCW	3.3"	6.75"	Ball

Lennox, Air-Flo Unit Heater

Commercial: Lennox 19J04, Fasco 7121-8812, 7021-8657

Part #	HP	Volts	Amps	Type	RPM	Rotation	Frame	Body	Bearing
FB-RFB135	1/65	115	0.7	SP/ Open	1/3000	CW	3.3"	5.5"	Sleeve

Lennox GCS3 Roof Top

Commercial: Lennox 98G8901 Fasco 7121-7091

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM890	1/25	208/230	0.7	SP/ Open	1/3200	CCW	3.29"	3.3"	Ball	2.3"x5/16"	66-A8677 (5"x1.1")

FM-RFM890
Motor Only

Lennox Roof Top

Commercial: Lennox 25J1201, Fasco 7121-8774

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM1198	1/30	115	1.5	SP/ Open	1/3200	CCW	3.40"	3.3"	Sleeve	2 1/4"x5/16"

Newmac Oil & Wood Furnace

Residential: Newmac 2040001

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
R7-RB33	1/55	115	0.88	SP/ Open	1/3200	CW	6.6"	3.3"	Sleeve

R7-RB33 Features a built-in variable speed control.

Nordyne, Frigidaire, Miller G5RC, G6RC, G1, G4 High Efficiency

Residential: 902977

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB902	1/19	115	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	5.5"	3.3"	Sleeve

Nordyne, Frigidaire, Miller G5RA, G6RA, G3 Mid Efficiency

Residential: 903111, UE9454

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB903	1/45	115	1.10	SP/ Open	1/3000	CCW	5.6"	3.3"	Sleeve

FB-RFB903 Comes with gasket.

Nutech 3.3" Double Shaft - Heat Recovery Blower

Cross Reference: Electrohome 2868-513-133, 152, Nutech Lifebreath 23202

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft
O1-R465	1/15	120	2.30	SP/ Open	3/1550	CW	4.0"	3.3"	Sleeve	2.3"x5/16"x2.1"

Nutech 5.0" Double Shaft - Heat Recovery Blower

Cross Reference: AO812B2355, Fasco 7184-0254 (M4-R2655)

Nubreath 23-204, GE5KCP298G8560BS, Fasco 7185-0242 (M4-R2324)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2655	1/12	115	1.10	PSC/ Open	5/370 Inc.	1/1550	CCW	3.0"	42	Sleeve	2.5"x3/8"x2.4"
M4-R2324	1/12	115	1.80	PSC/ Open	3/370 Inc.	1/1550	CCW	3.6"	42	Ball	2.7"x3/8"x2.6"

Olsen - Airco High Efficiency HCS-2 60, 75, 81, 90 Left Hand Discharge

Residential: 18102

Additional OEM on Page 2

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB181	1/54	115	1.2	SP/ Open	1/3200	CW	6.6"	3.3"	Ball

FB-RFB181 Comes with 3 brackets, fastening hardware, drain tubing & instructions.

Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

Olsen - Airco HCS-2 High Efficiency 60, 75, 81, 90 Right Hand Discharge

Residential: 20082, 11051403

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB200	1/54	115	1.2	SP/ Open	1/3200	CCW	6.6"	3.3"	Ball

FB-RFB200 Comes with 3 brackets, fastening hardware, drain tubing & instructions.




Olsen - Airco HMS/HMS-2T Mid Efficiency

Residential: 26986, 26987, 28436

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB112	1/45	115	1.30	SP/ Open	1/3000	CCW	6.0"	3.3"	Sleeve

Includes: Pressure switch, 2 gaskets, mounting plate, silicone tubing & Instructions.

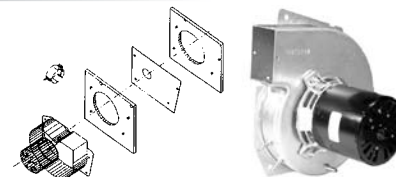

Olsen - Consolidated NUP 54-3, 72-3 High Efficiency

Residential: 4246100, JAIN107NS

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB140	1/49	115	1.4	SP/ Open	1/3400	CCW	5.6"	3.3"	Sleeve



Olsen - Consolidated NUP N12, 16, 20, 90-3, 108-5, 126-5 H.E.

Residential: 4246101

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB130	1/18	115	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	5.0"	3.3"	Sleeve



Olsen Roof Top

Commercial: 3255A

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB203	1/20	208/230	0.9	SP/ Open	1/3000	CCW	8.5"	3.3"	Ball



Remington - McQuay Incremental Evaporator Motor

Cross Reference: 24303, GE 5KCP39KGV3735

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M1-R52430	1/4	208/230	1.50	PSC/ Open	7.5/370	3/1060	CW	4.50"	5.5"	Sleeve	4.1"x1/2"x4.7"



Remington - McQuay Incremental Condenser Motor

Cross Reference: 10810, GE5KCP39GG1964BS

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M2-R10810	1/3	208/230	2.7	PSC/ Open	3/370	1/1625	CW	4.5"	5.5"	Sleeve	7.5"x1/2"



Remington - Singer Evaporator Motor

Cross Reference: American Air Filter-Singer Climate Control 02024224

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M4-R2675	1/30	208/30	0.4	PSC/ Open	2/370	4/1075	CCW	3.8"	4.75"	Sleeve	7.7"x1/2"x7.7"



Remington - Singer Condenser Motor

Cross Reference: Remington Singer 21662R, Franklin 74007

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
M2-R139	1/8	208/230	2.2	PSC/ Open	4/5/370	1/1075	CW	4.0"	48Y	Sleeve	9.0"x1/2"



Reversomatic Condo & Apartment



Figure 1B
R7-RB20
Illustrated



Figure 2B
R7-RB24
Illustrated



Figure 3B
R7-RB30
Illustrated



Figure 4
T1-R630
Illustrated



Figure 5
O6-R262
Illustrated



Figure 6
O6-R264
Illustrated



Figure 7
M3-R2605
Illustrated

Reversomatic Ventilation Fan Motors & Kits

Exhaust Fan Motors, Blowers, Brackets & Wheels

- 115 Volt
- Shaded Pole
- CW Rotation
- Blowers include motor, bracket & blade.



93-A7105
Illustrated



66-A610215
Illustrated

Motor Part #	Fig.	Blwr. Part #	Fig.	HP	Amps	RPM	CFM	Shaft	X-Ref.	Bracket #	Blower #	Dia.	Width	Bore	Rot.
T1-R630	4	R7-RB20	1B	1/35	0.76	1/1550	60	1.90"x7/32"	EB50	92-A8600	93-A7105	5"	1 1/8"	7/32"	CCW
O6-R260	5	R7-RB22	2B	1/90	0.60	1/1550	75	1.10"x5/16"	B60	92-A8602	66-A508202	5 1/16"	2"	5/16"	CCW
O6-R261	5	-	-	1/200	0.31	1/1550	77	1.75"x5/16"	QB68, QB80						
O6-R262	5	R7-RB24	2B	1/40	1.10	1/1550	116	1.80"x5/16"	B100 (RB24)	92-A8602	66-A508216	5 1/16"	2 5/32"	5/16"	CCW
O6-R264	6	R7-RB25	2B				130		K100 (RB25)	92-A8604	66-A610215	6 1/16"	2 5/32"	5/16"	CCW
O6-R265	5	R7-RB26	2B	1/75	0.70	1/1550	141	2.00"x5/16"	QK100						
O6-R266	5	-	-	1/90	0.65	1/1400	115	1.60"x5/16"	QB100, QFC125	92-A8604	66-A610215	6 1/16"	2 5/32"	5/16"	CCW
O6-R267	6	R7-RB28	2B	1/20	1.45	1/1550	201	1.40"x5/16"	BK100	92-A8604	66-A610215	6 1/16"	2 5/32"	5/16"	CCW
M3-R2603	7	-	-	1/50	0.85	1/1550	118	1.50"x5/16"	BB100						
M3-R2604	7	R7-RB30	3B	1/35	1.15	1/1550	268	2.20"x1/2"	DK260-DB200	92-A8606	66-A610220	6 1/16"	2 5/32"	1/2"	CW
M3-R2605	7	-	-	1/10	2.87	1/1550	300	2.00"x1/2"	DB300						
M4-R2605	7	-	-	1/12	3.0	1/1050	450	1.60"x1/2"	GPB450, QBD300						

Reznor General Replacement

Commercial: Reznor 43846 (115V), 43424 (208/230), FM-RFM7, FM-RFM8

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM78	1/10	115/230	1.3/0.7	PSC/ Open	2/370 Inc.	1/3200	Rev.	4.1"	3.3"	Ball	3.3"x5/16"	66-A8675

FM-RFM78 Double blower wheel 3.15" x 5/16"

Rheem-Ruud RGDE Mid Efficiency

Residential: Fasco 70-214196-83, A079

Additional OEM on Page 2

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB214	1/50	115	1.1	SP/ Open	1/3000	CW	5.63"	3.3"	Sleeve

FB-RFB214 Comes with gasket.

Rheem-Ruud Weather King RGP Mid Efficiency, Conquest 800

Residential: Fasco 70-24157-03, 70-22838-02

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB241	1/20	115	1.71	SP/ Open	1/3400	CCW	6.3"	Skel.	Ball

FB-RFB241 Comes with gasket mounted.

Rheem-Ruud RGDE Mid Efficiency

Residential: 70-214196-01, Fasco 7021-5239, Magnetek JA1M102

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB090	1/50	115	1.10	SP/ Open	1/3000	CCW	5.0"	3.3"	Sleeve

FB-RFB090 Comes with gasket.

Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

Rheem-Ruud Roof Top, PGB, PGA, PGD, GPD, RGMA

Commercial: Reem-Rudd 1070770, 101070, 107701 15-20-30 Ton

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB107	1/40	208/230	0.3	PSC/ Open	3/370	2/3350/2900	CW	3.3"	8.70"	Sleeve

FB-RFB107 Comes with gasket.



Rheem-Ruud Weather King RGT High Efficiency

Residential: 70-22162-81, 70-24149-01, 70-24157-03, 70-24206-01, Fasco 7062-1881

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB142	1/25	115	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	6.0"	3.3"	Sleeve

Residential: 70-24033-01, Fasco 7062-3861

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB136	1/20	115	0.75	PSC/ Open	4/250 Inc.	1/3450	CCW	6.25"	3.3"	Sleeve



RB-RFB142
Illustrated

Rheem-Ruud Hot Water Heater

Cross Reference: SP11608, Fasco 7062-7572


Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB139	1/55	115	0.95	SP/ Open	1/2970	CCW	11.0"	3.3"	Sleeve

FB-RFB127 Includes coupling, adapter horn, plug, screws & tubing.

Cross Reference: Rheem-Ruud 09-189, UE JA1M161NS

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB189	1/40	115	1.0	SP/ Open	1/3000	CCW	5.5"	3.3"	Sleeve

FB-RFB189 Includes 2 gaskets and 90° brass fitting.

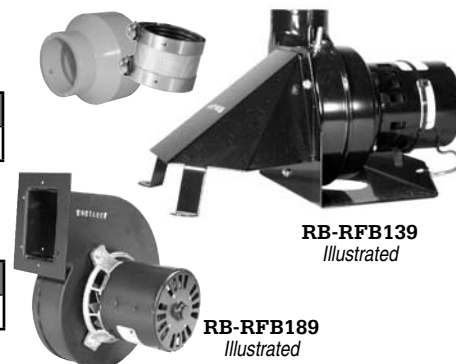

RB-RFB139
Illustrated

FB-RFB189
Illustrated

Trane Fan Coil Motors

Cross Reference: MOT 1876, CX70500133-01, UE DE3E152 (UE-641)

MOT 1877, X70 500149-04-7, EM K48HXBJA-956 (UE-953)

MOT 1978, MOT 481, X70 500149-11-7, EM K48HXCKT-1419 (UE-945)

MOT 1979, MOT 482, X70 500149-12-7, EM K48HXCKS-1418 (UE-955)


MOT 689, X70500354, UE DE2G101 (UE-642)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
UE-641	1/30	115	0.5	PSC/ Open	Inc.	3/1075	CW	3.5"	5"	Sleeve	8.5"x1/2"x9"
UE-953	1/15	115	0.8	PSC/ Open	Inc.	3/1100	CW	3.25"	5"	Sleeve	10.5"x1/2"x10.5"
UE-945	1/8	115	1.2	PSC/ Open	Inc.	3/1500	CW	4.0"	5"	Sleeve	9"x1/2"x7.5"
UE-955	1/6	115	2.0	PSC/ Open	Inc.	3/1500	CW	4.0"	5"	Sleeve	10.5"x1/2"x10.5"
UE-642	1/4	277	1.1	PSC/ Open	Inc.	3/1475	CW	4.0"	5"	Sleeve	8"x1/2"x8"

Cross Reference: MOT 1878, MOT 1875, X70500149-01-7, EM K48HXBYH-954

MOT 1875, X70500149-02, EM K48HXBH2955

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
UE-954	1/30	115	0.6	PSC/ Open	Inc.	3/1100	CW	4.0"	5"	Sleeve	8.5"x1/2"
UE-9608	1/20	115	0.6	PSC/ Open	Inc.	3/1100	Rev.	3.25"	5"	Sleeve	9.5"x1/2"

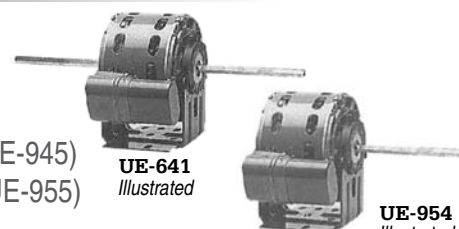

UE-641
Illustrated

UE-954
Illustrated

Trane Roof Top Flue Exhaust Blower

Residential: Trane X38040036037, 7062-1709

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB380	1/40	208/230	0.25	PSC/Open	2/370	1/2800	CCWLE	8.10"	3.3"	Ball



Rotation Determined Opposite Shaft End.
Double Shaft Determined Lead End.

Trane TUCG 60, 80, 100 High Efficiency

Residential: BW000517, UE9457

Additional OEM on Page 2

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB130	1/18	115	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	5.0"	3.3"	Sleeve



Trane Roof Top

Commercial: Trane 38040252, Amana-Tappan, Janitrol 4429-32, UE774

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB73	1/30	115/230	.82/.42	SP/ Open	1/3000	CW	5.3"	3.3"	Ball

FB-RFB73 Comes with round and square stud brackets.



Trane TUD40, 60, 80, 100 Mid Efficiency

Residential: BLW00473, Fasco 7012-8428

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB143	1/45	115	0.95	SP/ Open	1/3000	CCW	5.6"	3.3"	Sleeve



Vane Heat Recovery Motor

Cross Reference: M1703, Fasco 7190-0369

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
R3-R348	1/15	110/115	1.12	PSC/ SE	4.370 Inc.	2/1550	CCW	4.1"	3.3"	Sleeve	3.35"x3/8"



Venmar Make Up Air Unit 3.3" Motor

Cross Reference: 01038, Fasco 7190-2008 (R2-R438)

02101, Fasco 7190-2271, Kit 12027, 12029, 12109 (R2-R462)

02209, Fasco 7190-1522 (R2-R422)

02100, Fasco 7190-1523, Kit 1206, 12151 (R3-R366)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
R2-R438	1/7	115	1.03	PSC/ SE	4/370	2/1600	CW	4.31"	3.3"	Sleeve	5/16" x 1.55"
R2-R462	1/8	115	0.90	PSC/ SE	7.5/370	3/1660	CW	4.13"	3.3"	Sleeve	3.5" x 3/8" x 3.5"
R2-R422	1/3	115	2.89	PSC/ SE	7.5/370	3/1690	CW	4.93"	3.3"	Sleeve	3/8"x2.06"
R3-R366	1/4	115	1.68	PSC/ SE	7.5/370	3/1630	CW	4.78"	3.3"	Sleeve	2.97"x3/8"x3.00"



York P3UR A, B, C, D High Efficiency

Residential: 7314249-70, 3242500-7000, Fasco 7062-2442, Luxaire

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB137	1/25	115	0.70	PSC/ Open	4/250 Inc.	1/3450	CCW	6.0"	3.3"	Sleeve



York Furnace P4-HUA012 Mid Efficiency Blower N064000

Residential: York 824-27519-000, Fasco 7021-9428, Luxaire

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB154	1/30	115	1.2	SP/ Open	1/3000	CCW	6.0"	3.3"	Sleeve

FB-RFB154 Comes with gasket mounted.



York Furnace P3-URB High Efficiency Blower

Residential: York 024-25960-000, Coleman 2940391P, Fasco 7062-3958, A165, Luxaire

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB165	1/25	115	0.70	PSC/ Open	4/370 Inc.	1/3450	CCW	6.4"	3.3"	Sleeve



York Roof Top, D8SA, D9SA

Commercial: York 026-22239-700, UE771, Fasco A063, U464E, 7021-4314

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB63	1/40	208/230	0.45	SP/ Open	1/3000	CW	6.3"	3.3"	Ball



York D8SA, D9SA, Fedders, Trane

Commercial: York 026-0224-000, 001, 007, 26-22239, 26-20224, UE770, 408, 512, Fasco A063

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB5	1/35	115/230	.95/.49	SP/ Open	1/3000	CW	8.6"	3.3"	Ball

FB-RFB5 comes with round & square mounting brackets and mounting hardware. Built in centrifugal switch.



York Roof Top DCG

Commercial: York 326-0296-700, 26-29600, 326-2960-0000

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB296	1/40	460	0.3	SP/ Open	1/3000	CCW	8.2"	3.3"	Sleeve

FB-RFB296 Comes with gasket. Built in centrifugal switch.



York P9UGD, PHUGD Standard Efficiency

Residential: 026-2510-000, 026-6525-120 C000, Luxaire

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB251	1/50	115	1.10	SP/ Open	1/3000	CW	5.3"	3.3"	Ball

FB-RFB251 Comes with gasket.




York 10 Ton Roof Top Blower DICG120N16525A

Commercial: 024-2500-5004, 5005, 5702, D1187

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
FB-RFB187	1/10	460	0.30	PSC/ SE	4/370 Inc.	1/3400	CW	6.8"	3.3"	Ball	3/8" x 8 3/4"

FB-RFB187 includes 66-A8666 & 66-A8667 blower wheels. Built in centrifugal switch.



York 10 Ton Roof Top DICG120N16525A

Commercial: 024-2500-5004, 5005, 5702, D1187

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft
FM-RFM187	1/10	460	0.30	PSC/ SE	4/370 Inc.	1/3400	CW	6.8"	3.3"	Ball	3/8" x 8 3/4"

FM-RFM187 Does NOT include 66-A8666 & 66-A8667 blower wheels. Built in centrifugal switch.



York Roof Top DCG Unit

Commercial: York 024-24115-017, 018, 705, 326-25999-000

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB144	1/40	208/230	0.45	SP/ Open	1/3000	CCW	8.0"	3.3"	Sleeve

FB-RFB144 Comes with gasket. Built in centrifugal switch.



York D1, D2, 7.5 Ton Roof Top Unit

Commercial: 024-24115-017, 020, 713, Fasco 7162-4547

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB461	1/40	460	0.30	PSC/ Open	4/370 Inc.	1/3200	Rev.	9.5"	3.3"	Ball

FB-RFB461 Built in centrifugal switch.




York D1, D2 Roof Top Unit

Commercial: 024-24115-017, 020, 713, Fasco 7162-4547

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB462	1/40	460	0.30	PSC/ Open	4/370 Inc.	1/3200	Rev.	10.5"	3.3"	Ball

FB-RFB462 Built in centrifugal switch.



York D1, D2 Roof Top Unit

Commercial: 024-24115-017, 019B, 020, 713, Fasco 7162-4547

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB463	1/34	460	0.37	SP/ Open	1/3200	CW	8.25"	3.3"	Ball

FB-RFB463 Built in centrifugal switch.




York D1, D2 5 Ton Roof Top Unit

Commercial: York 024-24115-714,018

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB231	1/8	230	0.6	PSC/ Open	4/370 Inc.	1/3200	Rev.	9.6"	3.3"	Ball

FB-RFB231 Built in centrifugal switch.



York D1, D2 7.5 Ton Roof Top Unit

Commercial: York 024-24115-714,018

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing
FB-RFB232	1/8	230	0.6	PSC/ Open	4/370 Inc.	1/3200	Rev.	10.5"	3.3"	Ball

FB-RFB231 Built in centrifugal switch.



York 3.3" Flue Exhaust D1, D2 Roof Top Unit 3.5 To 5 Ton

Commercial: 024-24115-017, 018, 020, 713, Fasco 7162-4547

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB654	1/16	230/460	1.2/0.6	SP/ Open	1/3000	CW	10.2	3.3"	Ball

FB-RFB654 Built in centrifugal switch.



York D3CG076N105-25D Roof Top Unit 7.5 To 20 Ton

Commercial: 024-24115-017, 018, 020, Fasco 7162-4547

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing
FB-RFB655	1/16	230/460	1.2/.6	SP/ Open	1/3000	CW	11.1	3.3"	Ball

FB-RFB655 Built in centrifugal switch.



York D1, D2 Roof Top Unit

Commercial: 024-24115-020, 714 (FM-RFM230)

024-24115-012, 017, 700, 709, 713, Fasco D1171, YVFM450 (FM-RFM460)

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM230	1/8	230	0.60	PSC/ Open	4/370 Inc.	1/3200	Rev.	6.9"	3.3"	Ball	2 1/2"x1/4"	66-A8660 (4"x1")
FM-RFM460	1/10	460	0.30	PSC/ Open	4/370 Inc.	1/3200	Rev.	6.9"	3.3"	Ball	2 1/2"x1/4"	66-A8665 (4"x2")

FM-RFM460 & FM-RFM230 Come with 5/16" shaft adapter. Built in centrifugal switch.

FM-RFM230
Illustrated



York D1, D2, D3 Roof Top Unit

Commercial: Magnetek 660, Fasco D1171, U660 (FM-RFM3)

Magnetek 653, Fasco D1174 (FM-RFM653)

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM3	1/16	230/460	.44/.22	SP/ Open	1/3000	CCW	6.2"	3.3"	Ball	2.3"x1/4"	66-A8655
FM-RFM653	1/16	230/460	1.2/.6	SP/ Open	1/3000	CW	6.6	3.3"	Ball	2.3"x1/4"	66-A8650

FM-RFM3 & FM-RFM653 Built in centrifugal switch.



York Roof Top

Commercial: 024-24115-018B, 019B

Part #	HP	Volts	Amps	Type	RPM	Rotation	Body	Frame	Bearing	Shaft	Wheel
FM-RFM461	1/40	460	0.37	SP/ Open	1/3200	CW	5.7"	3.3"	Ball	2.5"x1/4"	66-A8660

FM-RFM461 Built in centrifugal switch.



In-Line Air Duct Booster Fans

Air Duct Booster

Designed to be installed at any angle in the branch duct of under-ventilated rooms to increase either hot or cool air flow supply. One year limited warranty.

Control Options

Manual Control

- 115V Source - continuous operation.
- 115V Switch - manual ON/ OFF ctrl.

Automatic Control

- Wire to furnace fan.
- Wire to fan switch.
- Wire to a sail switch.
- Wire to a pressure switch.
- Wire to thermostat.



Standard Air Duct Boosters

Part #	Description	Max Boosted CFM	Free Air CFM	Watts	Amps	dBA	Blade	Housing Length
T9-DB68	6" - 8" Universal Round	250	160	30	0.35	50	Polycarbonate	4"x11"
T9-DB6-2CR	6" Rnd Double Crimp	250	160	30	0.35	50	Polycarbonate	8"
T9-DB4	4" Round	80	40	30	0.30	52	Polycarbonate	6"
T9-DB5	5" Round	225	140	30	0.35	51	Polycarbonate	6"
T9-DB6	6" Round	250	160	30	0.35	50	Polycarbonate	6"
T9-DB8	8" Round	500	210	60	0.75	54	Polycarbonate	8"
T9-DB10	10" Round	650	300	120	1.50	55	Aluminium	8"
T9-DB12R	12" Round	800	650	120	1.50	55	Aluminium	8"
T9-MCM14	14" Round	1500	-	71	1.00	-	Aluminium	9"



T9-DB68
Illustrated



T9-DB6
Illustrated

Two Speed Air Duct Boosters



Part #	Description	Max Boosted CFM	Free Air CFM	Watts	Amps	dBA	Blade
T9-DB5-2	5" Round 2 Speed	180/270	90/140	30	0.35	50/52	Polycarbonate
T9-DB6-2	6" Round 2 Speed	200/300	160/180	30	0.35	50/52	Polycarbonate
T9-DB8-2	8" Round 2 Speed	500/600	210/250	60	0.85	50/55	Polycarbonate
T9-DB10-2	10" Round 2 Speed	650/900	300/460	135	1.70	56/59	Aluminium




T9-DB5-2
Illustrated

4-Pole Duct Boosters

Designed for larger ducts requiring commercial grade power and performance.



Part #	Description	Max Boosted CFM	Free Air CFM	Watts	Amps	dBA	Blade
T9-DB124	12" Round	1160	700	120	1.00	61	Aluminium
T9-DB144	14" Round	1580	900	120	1.00	61	Aluminium
T9-DB164	16" Round	1760	1100	120	1.00	54	Aluminium



4-Pole Duct
Booster Illustrated

Motorized Duct Dampers

Motorized Dampers



Normally Open Part #	Normally Closed Part #	Duct Dia.	Weight
T9-MD5-NO	T9-MD5-NC	5"	3.5
T9-MD6-NO	T9-MD6-NC	6"	3.5
T9-MD7-NO	T9-MD7-NC	7"	3.5
T9-MD8-NO	T9-MD8-NC	8"	4.0
T9-MD10-NO	T9-MD10-NC	10"	5.0
T9-MD12-NO	T9-MD12-NC	12"	6.0

Features

- Available in normally open or normally closed 5", 6", 7", 8", 10" and 12" duct diameters.
- 8" Housing lengths.
- 24VAC, 0.25 amps.
- 100% Shutoff available.
- 3 Year limited warranty.

Zone Control



T9-DM6
Illustrated

Thru The Wall Fans

ThruWall Room To Room Fans

The T9-TW8-2 and T9-TW208 ThruWall™ fans easily install in an interior wall to move heated or cooled air from one adjoining room to another, providing year round comfort.

**1 Year
Limited
Warranty**



T9-TW8-2



T9-TW208

**Direction Airflow!
360° Rotating Grill**

ThruWall Fans

Part #	Features	Description	wts	Amps	CFM	dBa	Weight
T9-TW8-2	• 3 Position, 2 Speed switch	Grill 9.75" Housing 7 5/8" dia.	115	0.85	160 CFM low spd 200 CFM high spd.	High: 55 Low: 49	5.0 lbs.
T9-TW208	• Built-in solid state speed control allows for fan speed & sound level control. • 360° Rotating grill allows airflow direction to be changed.	Front: 12.5"x10" Back: 9.75" dia. Housing: 8" dia.	115	1.0	100 CFM low spd 200 CFM high spd.	High: 55 Low: 49	5.0 lbs.

60 Hz., Thermally protected, Class B insulation.

Door Frame Fan

Entreeair® Door Frame Fan

The T9-DF100 is a safe, efficient and effective way to gently circulate warm or cool air from room to room.

Door Frame Fan

Part #	Description	Volts	Amps	CFM	Weight
T9-DF100	7" Grill diameter.	115	0.35	100 CFM.	2.0 lbs.

60 Hz., Thermally protected, Class B insulation.

- Quiet operation.
- Simple installation.
- In-line ON/OFF power switch.
- 10' Cord.
- Patented design.

**1 Year
Limited
Warranty**



T9-DF100
illustrated

Register Air Booster

Equalizer® Register Booster

T9-EQ2 boosts airflow to problem areas for the comfort your family deserves. T9-EQ2 uses a powerful yet quiet fan to pull extra air out of weak registers, increasing airflow by up to 80%.

Register Air Booster

Part #	Dimensions	Volts	Amps	Weight
T9-EQ2	12" x 6-1/4" x 3-1/4"	115	0.35	2.25 lbs.

60 Hz., Thermally protected, Class B insulation.

- Place and plug convenience.
- Boosts heating and air conditioning.
- 6' Cord w/ 2 prong plug.
- Fits over floor or wall registers up to 6" x 12".



T9-EQ2

Manual - On/Off
Auto - Heat/Cool

(Adjustable thermostat & sensitivity differential)

Duct Thermostat

Plug-In Duct Stat

The T9-DS45110 duct stat simplifies installation of in-line duct booster fans by eliminating electrical connections at the furnace.

- Economical and reliable automatic on/off control for in-line duct booster fans.
- Mounts on duct or wall to control ambient room temperature.
- Adjustable temperature range: 45° F (7° C) to 110° F (43° C) and differential.
- 6' Grounded cord.
- Year round use, ON/ OFF, AUTO heating and AUTO cooling .
- Controls various devices, including alarms, heat lamps, lights, louvers, etc.

**1 Year
Limited
Warranty**



T9-DS45110
illustrated

Plug-In Switch - Thermostatically Controlled

Part #	Description	Volts	Dimensions	Weight
T9-DS45110	5 Amp maximum load (replaceable 5A fuse).	115	5.50" x 3.25" x 2.25"	1.25 lbs.

In-Line Air Duct Booster Fans

Serious Air Power With Quiet Operation



THE POWER OF BLUE
CENTRAX™



Features

- High Volume & Pressure
- Installs In Any Position
- Ball Bearings Are Permanently Sealed & Lubricated
- Backwards Inclined Blades
- Vibration Absorbing Material
- Class B TP Auto Reset
- UB Protected / Flame Retardant
- Thermal Plastic Resin
- 140°F(60°C) Maximum Air Stream Temperature

**5 YEAR
LIMITED
Warranty**

Accessories

- Speed Control
- Power Cord
- Auto Switch
- Duct Mufflers

Applications

- Ventilation
- Exhaust
- In-Line Boosting
- Radon Mitigation
- Dryer Vent Boosting

Part #	Amps	Watts	Duct Dia.	Volts	Hz	CFM
T9-TF104	0.53	40	4"	115	60	200
T9-TF106	1.00	70	6"	115	60	409
T9-TF108	1.70	120	8"	115	60	650

Duct Muffler



IN-LINE NOISE MUFFLER™
DUCTMUFFLER™

Part #	Diameter	Length
T9-DM105	5"	24"
T9-DM106	6"	24"
T9-DM108	8"	24"
T9-DM110	10"	36"
T9-DM112	12"	36"

The DuctMuffler™ reduces noise traveling through ductwork. Sound reduction for composite noise averages 9dBA to 20dBA.

Building Code Compliant, Meets NFPA standards 90A And 90 B. UL® Listed Acoustic Liner, Class 1 Air Duct

ROTOM® is a registered trade marks of ALLTEMP® PRODUCTS COMPANY LIMITED. ALLTEMP® has made an effort to illustrate with photos, outline drawings and/or descriptions, the products in this catalogue. These are for the sole purpose of identification. We do not express or imply that products conform exactly to the descriptions, drawings and/or photos. All reasonable effort has been made to accurately determine a suitable product. However, all users are solely responsible to evaluate and determine for themselves the suitability of the product purchased for the use intended. All information, data and dimension tables in this catalogue have been carefully compiled and thoroughly checked. However, no responsibility for possible errors or omissions can be assumed. The company reserves the right to change specifications and other information included in this catalogue without notice. The vendor's responsibility shall be limited only to its written warranty and the vendor shall not be responsible for any loss, cost or damage whatsoever from the use of this product by you or your customers.